



HC-B 10-AMQ-EMV

Order No.: 1642522

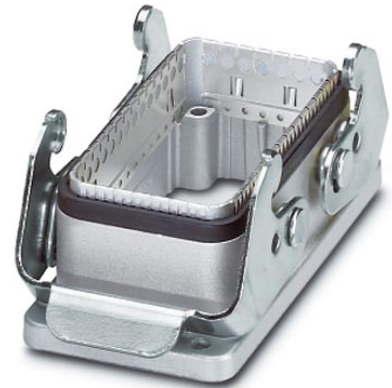

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642522>

HEAVYCON panel mounting base B10, with double locking latch, EMC version. Not suitable for D series terminal adapters

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  4 046356 028462 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 519 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
07/03/2006




<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|----------------|--|
| General data | |
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 30.5 mm |
| Width | 48 mm |

| | |
|---------------------------------|---|
| Length | 93 mm |
| Housing type | EMC housings |
| Locking type | With double locking latch |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 100 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | EMC coating, silver |
| Seal material | NBR, conductive |
| Material lock | Steel, galvanized |
| Length of the assembly cutout | 60 mm |
| Width of the assembly cutout | 35 mm |
| Assembly instructions | Cannot be used for HC-D... series terminal adapters. |
| Connection | If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding. |


Diagrams/Drawings

Diagram

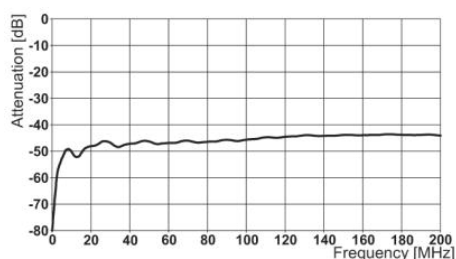


Shield attenuation

Dimensioned drawing

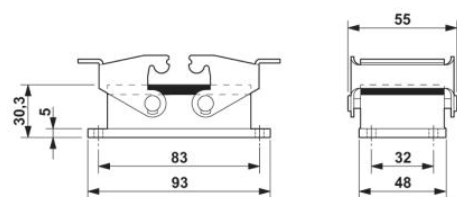

Dimensional drawing

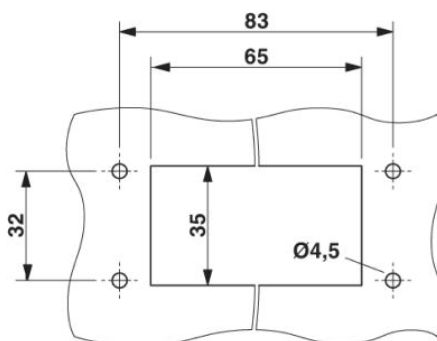

Panel cutout

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;