
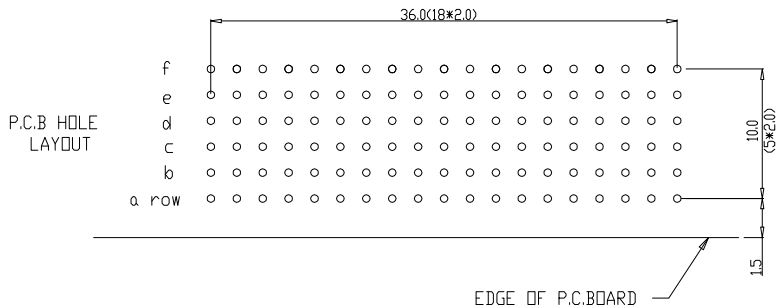


PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

1. LEAD FREE INDICATOR :LF=LEAD FREE
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- 3 .FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

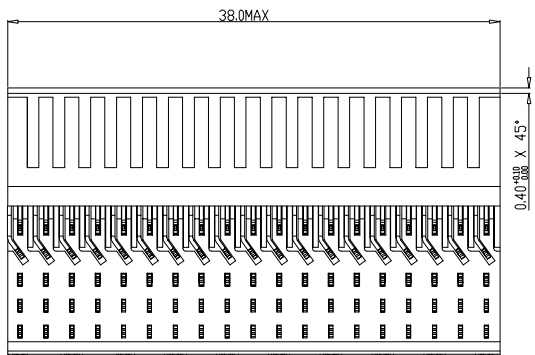

rev	ecn no	dr	date	Dr	15 10 97	Mfret	Product family	size	Scale
A	CONVERSION REVISION 01	KN	14-9-01	Eng				A1	5.000
B	DG05-0278	kason	02-08-05	Chr			Model Name	ECN	
C	DG07-0362	kason	05/09/07	Appr			Model Revision	REL Level	
D	DG10-0110	NZ	10/13/10						

Material	Mat code	Heatreat	Plating/Finish	Dr	15 10 97	Mfret	Product family	size	Scale
				Eng				A1	5.000
				Chr			Model Name	ECN	
				Appr			Model Revision	REL Level	

Material	Spec ref	TOLERANCE	1DEC ±0.2 1DEC	2DEC ±0.1 2DEC	ANGLES ±1°H0EKEN	MM
MPACS 5+2R RA	RCP CONN TYPE B	BS.C .201444.038				

This drawing is the property of FCI. It is to be used only for the specific application and for the specific quantity and conditions as stated on the drawing. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of FCI. Copyright © 2011.

